

# Installation Guidance for Smart Access 360 Controller


SmartAccess360 controller can be installed on any door or gate with an electric strike, whether it is already connected to an access control panel or not.

**The controller requires:**

- 1) Internet connection (hardwired with CAT5e/6 or on WiFi)
- 2) Electric power supply
- 3) Two wires between the controller relay to the actuator (ex: electric strike) or the existing access panel.

**Direct installation**

SmartAccess360 controller works on DC circuit systems and is compatible with any type of electric lock. Connect cables from the relay port according to the diagram. The controller should be installed close to the door, avoiding any metal enclosures. It can sit in a drop-down ceiling or be mounted on a wall above/next to the door.

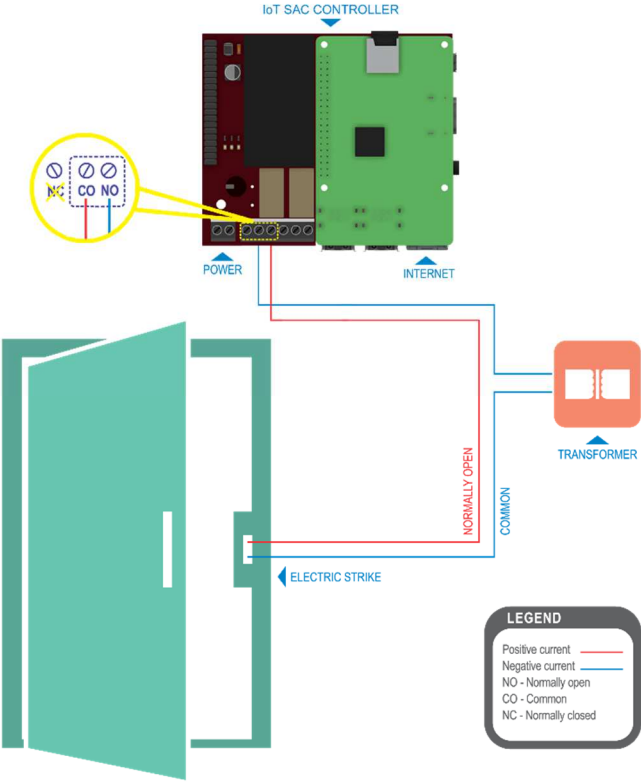

## Installation with existing access control solution

SmartAccess360 controller can work within an existing access panel to control the operation of the electric strike. The existing access panel will have a secondary relay (or doorman relay) that the SmartAccess360 controller can be wired into.

